

7420 Tractor (MFWD)

P11761 A.1



(Specifications and design subject to change without notice)

7520 Tractor (MFWD)

P11762 A.1



(Specifications and design subject to change without notice)

To The Customer

The part numbers in this Parts Catalog were correct at the time of publication. Per John Deere policy, we continuously improve our products. Therefore, when ordering parts verify the part numbers with your dealer.

SI Units of Measure

Metric dimensions are provided as applicable throughout this parts catalog.

Bolt and Cap Screw Strength Identification

Bolts and cap screws required to have high-strength qualities equivalent to metric property class 10.9 (SAE grade 8) or higher are identified throughout this catalog by the description 10.9, 12.9 or 14.9. All standard bolts and cap screws are metric property class 8.8 (SAE grade 5) or lower.

Serial Number Listing Information

Serial number information is listed to show on which machines each part can be used; for example:

- The part can be used on all products.
- 000000 – The part can be used on products beginning with the serial number listed.
- 000000 The part can be used on products up to and including the serial number listed.
- 000000 – 000000 The part can be used on products between and including the serial number listed.

When XXXXXX's are listed in place of a serial number, a serial number change was made, but the exact serial number was not available at the time of publication.

Illustrations

Illustrations in this catalog are only intended as a reference for dealers and customers. These illustrations do not necessarily represent the exact view of the parts.

Box-Enclosed Illustrations

Box-enclosed keyed parts in the illustration are available as a service assembly or an attachment. These parts may also include parts not available for service. The illustrations may not show all individual parts of an attachment. A box not keyed includes non-current parts.

Orientation Of Product

An arrow shown with an illustration is to indicate the direction of product forward travel. Right Hand (RH) and Left Hand (LH) sides are determined by product forward travel.

Orientation of Engine

Right Hand (RH) and Left Hand (LH) sides are determined by standing at flywheel and facing the engine.

John Deere Remanufactured Components

The REMAN parts listed in this catalog are intended for the repair or replacement of failed or worn original equipment components. John Deere Reman components are manufactured to stringent John Deere standards and produced to original John Deere specifications that incorporates the latest design and performance improvement updates.

Ag and Turf Tractor — Trademarks

ACS™	GreenStar™	PowrQuad™
ActiveSeat™	Harvest Smart™	PowrReverser™
AirCushion™	HarvestLab™	PowrSync™
AutoPowr™	HillMaster™	ProDrive™
AutoQuad™	HydraFlex™	QuikTach™
AutoTrac™	iMatch™	Reman™
Bullet Rotor™	iTorque™	Roll-Gard™
ClimaTrak™	IVLOC™	Service ADVISOR™
ComfortCommand™	IVT™	StarFire™
ComfortGard™	JLink™	StellarSupport™
CommandARM™	Load Command™	STS™
CommandCenter™	Mega Track™	SyncReverser™
CommandTouch™	Nothing Runs Like a Deere™	SyncroPlus™
CommandView™	Parallel Tracking™	SyncShift™
Contour-Master™	PermaClutch 2™	SyncShuttle™
COOL-GARD™	Phoenix™	TLS™ (Triple-Link Suspension)
Field Office™	Power Zero™	TMIII™
FieldCruise™	PowerGard™	TMII™
Funk™	PowerTech™	Vari-Cool™

Ag and Turf Tractor — Terms and Abbreviations

Phrase	Meaning	Phrase	Meaning
A/C	Air Conditioning	OD	Outside Diameter
ALSO ORDER	Also Order	OOS	Open Operator's Station
APPL	This Application Only	OPTION	Option
AR	As Required	OR	Or
ASSY	Complete Assembly	ORD	Order
ATC	Control Unit for ClimaTrak™	ORD W/	Order With
BCU	Basic Control Unit	OS	Oversize
BIF	Basic Informator	PC0	Power Module (Roof)
CNLA	Complete No Longer Available (Order Individual Parts)	PC5	Power Module (Transmission)
CTL	Cut To Length	PC6	Power Module (HF, CAB)
DSM	Distributed Tractor Informator Switch Module	PEC	Control Unit for PowrQuad™ / E-ICV
ECU	Engine Control Unit	PKG	Package of
EPC	PowrQuad™ PLUS Transmis- sion Control Unit	PLC	Parking Lock Control Unit
EPQT	Electrically Operated PowrQuad™ Transmission	PRF	Performance Monitor
ETC	Electronic Temperature Con- trol	PTO	Power Take-Off
FI	Field Installation Kit	RATIO	Ratio
FIP	Fuel Injection Pump	RCU	Reverser Control Unit
FOR	For	REAR	Rear
FRONT	Front	REMAN	Remanufactured
GSD	GreenStar™ Display	RH	Right Hand
HCS	Hydraulic Cab Suspension	SCV	Selective Control Valve
HTC	Heater Control Unit	SFA	Control Unit for Front Axle Suspension and/Or Cab Sus- pension
ID	Inside Diameter	SIC	E-SCV/E-ICV Control Unit
INCL	Includes	SSU	Control Unit for Steering Sys- tem (AutoTrac™)
INCL KEYS	Including Keys	STD	Standard
IOOS	Isolated Open Operator's Sta- tion	SUB	Replaced by
JDL	JDLink™ Control Unit	SUB FOR	Substitute for
KIT	Kit	TCU	Transmission Control Unit (Au- toPowr™/IVT™)
LGTH	Length	TEC	Tractor Equipment Control Unit
LH	Left Hand	TK	Thickness
Phrase	Meaning	Phrase	Meaning


7420 and 7520 Tractors

LOW	Lower	TSC	Control Unit for MFWD Axle With TLS™ and Cab Suspension
MARKED	Marked	UIC	User Interface Control Unit
MF	Made From	UIM	User Interface Module
MFWD	Mechanical Front Wheel Drive	UP	Upper
M-ICV	Mechanical Operated Control Valve (Mid-Mounted)	USE WITH	Use With
M-SCV	Mechanical Operated Selective Control Valve	VTI	John Deere Isobus Display
NA	Not Applicable	W/	With
NLA	No Longer Available	W/O	Without
NSEP	Not Supplied Separately	Z	Gear and Sprocket Teeth Number

Product Identification Number, 13-Digit

When writing or filling out warranty claim use all numbers, letters and spaces on the serial number plate.

PUM12072 A.1

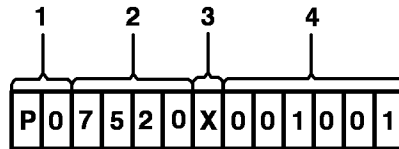

PUM12072

1 – Designates Tractor Manufacturer	P0 – Inds. John Deere, S.A. De C.V.
2 – Designates Tractor Model	7520
3 – Designates Suffix of Tractor Model	X - Basic Factor
4 – Designates Tractor Serial Number	001001

The basic tractor serial number plate is located on the right or left hand side of the front support.